

Multiwrap

Fire Wrap



Fire resistance
≤ 240 minutes



Working life
10 years



Applicability
Can be used outdoors

Fire Wrap

Multiwrap is a graphite-based self-adhesive wrap on a roll, for the fire-resistant sealing of flammable pipes and insulation. The Multiwrap provides a fire-resistant seal to adjacent rooms. Multiwrap reacts to heat and it seals openings caused by the melting of plastic pipes or flammable insulation.

Multiwrap forms part of the Mulcol® Penetration Seal System.

Advantages

- ✓ CE-certified
- ✓ Environmentally and user-friendly
- ✓ Quick and easy application
- ✓ Ideal for hard-to-reach assembly locations
- ✓ Waterproof
- ✓ Halogen-free
- ✓ Working life of 10 years

Application

- ✓ Rigid floors
- ✓ Rigid walls
- ✓ Flexible walls
- ✓ Firestop boards

- ✓ Plastic pipes with a diameter of up to Ø 160 mm
- ✓ Metal pipes with flammable insulation

Technical data

Colour	Anthracite
Application temperature	0 °C to +50 °C
Temperature resistance	0 °C to +80 °C
Reaction to fire	Class F in accordance with EN 13501-1

Packaging

	Dimensions	Box	Outer box	Pallet	Article number
Roll	10000 x 50 x 1.8 mm	1 piece	8 pieces	480 pieces	207001050



Technical documents available

- ✓ Product Data Sheet (PDS)
- ✓ Technical Data Sheet (TDS)
- ✓ Safety Data Sheet (SDS)
- ✓ Installation Manual
- ✓ EC certificate 0843-CPR-0325

Approvals

- ✓ Tested in accordance with EN 1366-3
- ✓ Classification in accordance with EN 13501-2
- ✓ Certified in accordance with ETAG 026-2
- ✓ ETA report 16/0564
- ✓ Declaration of Performance (DoP) no. PSS-MW 0843-CPR-0325

The above documents are available from your Mulcol contact person or via www.mulcol.com

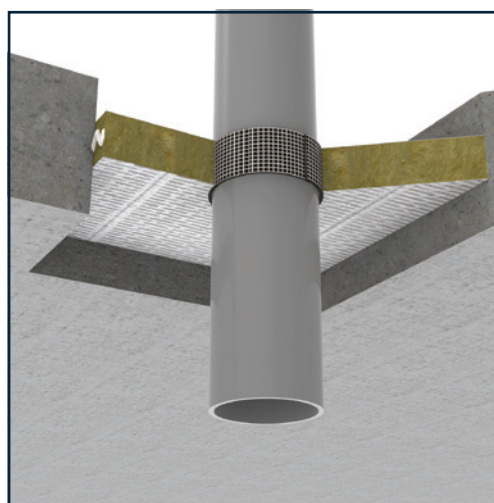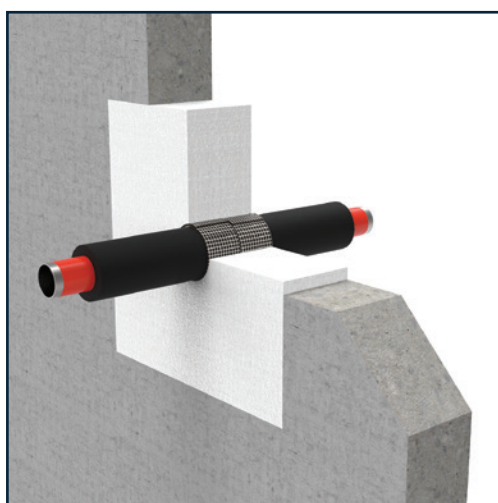

Virtual Reality



Augmented Reality



Information



Mulcol International composed the technical data on this sheet with great care and reserves the right to change product properties without prior notification. The user of this data remains responsible at all times for the correct application thereof. In the event of a lack of clarity or doubt, we recommend consulting Mulcol International to confirm that this data complies with the required application.