


## ABSORPTION

### ABSORBEL S 25 AF - sound absorbing foam with perforated top layer

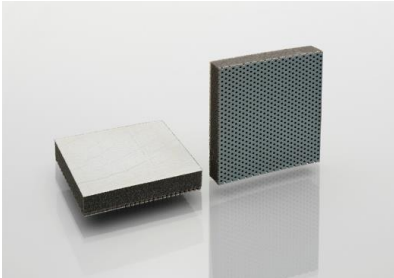

ABSORBEL	Thickness	Weight
S 25 AF	25 mm	1,7 kg/m <sup>2</sup>

#### Description

Absorbel S 25 AF is a self-adhesive open cell polyurethane foam with strong perforated top layer. Absorbel S 25 AF has an anthracite or white color, an attractive finish and is suitable for indoor use.

#### Characteristics

- Very good noise absorption qualities
- Perforated top layer hardly influences the absorption properties
- Flame retardant in accordance with DIN 53438, MVSS 302
- Easy to cut with a (Stanley) knife or saw with band saw
- Resistant to ageing and temperatures from -30 to +90 °C

#### Application

Lining cabins, engine rooms, enclosing cabinets, telephone hoods and wherever a strong and attractive protective layer is needed

#### Processing

Surface must be clean, dry and dust and grease free  
 Glue non-self-adhesive sheets on foam-side with TEROKAL-2444 contact adhesive (approx. 300 g/m<sup>2</sup>)  
 We advise priming rough or porous surfaces (i.e. wood, stone) with TEROKAL-2444  
 Good adhesion is obtained by carefully pressing and rolling down  
 Do not process sheets at temperatures below 10 °C  
 For further instructions see also the application sheet of self-adhesive products

#### Dimensions

Sheets of 2000 x 1000 mm  
 For weight and thickness see table above  
 Die-cut tailor-made parts available

## ABSORPTION VALUE

Absorption material  
Measured follows

ABSORBEL S 25 AF  
DIN 52215

