





FOAMGLAS®

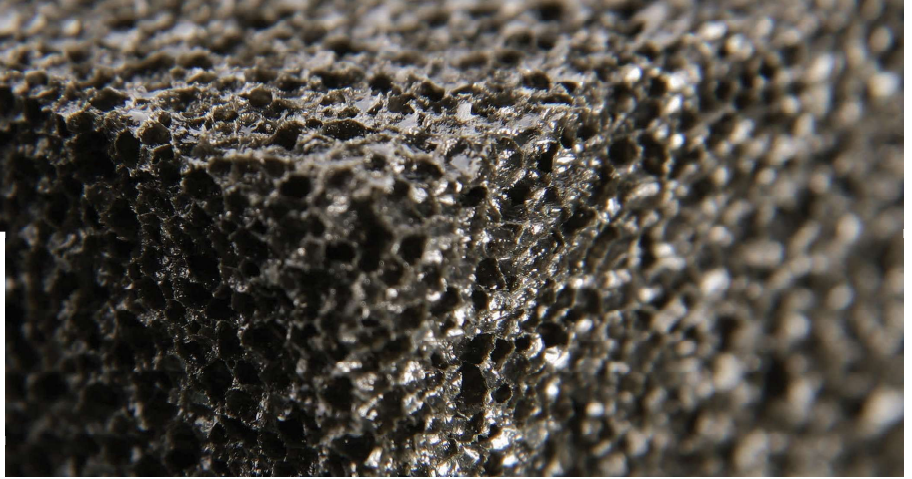

PITTSEAL® CW SEALANT

Kleberauftrag für Halbschalen

Verarbeitungstemperatur: +5 °C bis +40 °C
Verarbeitung: Siehe Technisches Datenblatt



Kleberraupe Durchmesser 5-7 mm bestehend aus PITTSEAL® CW sealant mit Kartusche (305 ml) oder Schlauchbeutel (600 ml) aufgetragen.

Pro Schale einmal Längsnaht, einmal Stoßfuge und einmal Abschottungsklebenaht.

FOAMGLAS® CW Sealant Klebermenge

Kartusche: 290 ml = 460 g
Schlauchbeutel: 600 ml = 960 g

Rohrdurchmesser	Klebermenge g/lfm - Rohr
21/25	72
27/25	76
34/25	79
42/25	82
48/25	83
60/25	87
76/25	92
89/25	138
114/25	150
140/30	164

Rohrdurchmesser	Klebermenge g/lfm - Rohr
168/30	176
219/40	203
273/40	318
324/40	342
356/40	357
406/40	380
457/40	420
508/40	460
559/40	490
610/40	530



A continuous seal must be provided for the full length of all joints. Care should be taken to ensure that sealant in the longitudinal and circumferential joints meet in order to avoid sealant gaps.

Install the pipe shells by



Make sure you press it well so that excess sealant is squeezed out.



Use your spatula to spread the sealant that has been squeezed out.