

STANDARD KAPPENSCHLOSS 2/55/60 F

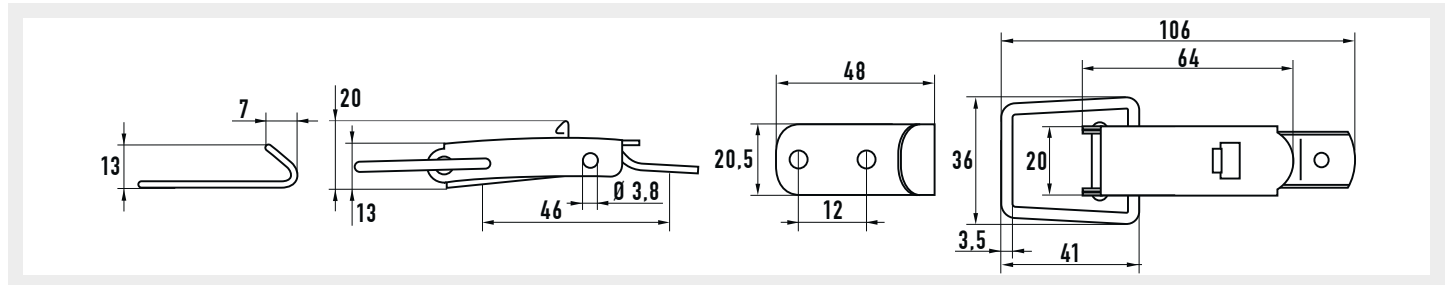
MIT FEDERSICHERUNG, GEWÖLBTER GRUNDPLATTE UND GEGENHAKEN

STANDARD TOGGLE 2/55/60 F

WITH ADDITIONAL SPRING, CURVED BASE PLATE AND HOOK



GRENOUILLÈRE STANDARD 2/55/60 F

AVEC CRAN SÉCURITÉ, PATTE BOMBÉE ET CROCHET





Nietloch / rivet hole / trou pour rivet Ø 3,3 mm / Ø 3,5 mm / Ø 4,2 mm (Standard)



D: Stahl verzinkt
GB: Steel zinc plated
F: Acier zingué

Ø		
3,3	100	55430 11252
3,5	100	55430 11253
4,2	100	55430 11255

D: Edelstahl A2 W.-Nr. 1.4301/03 AISI 304
GB: Stainless steel A2 W.-Nr. 1.4301/03 AISI 304
F: Acier inox A2 W.-Nr. 1.4301/03 AISI 304

Ø		
3,3	100	55445 12252
3,5	100	55445 12253
4,2	100	55445 12255

D: Edelstahl A4 W.-Nr. 1.4401 AISI 316
GB: Stainless steel A4 W.-Nr. 1.4401 AISI 316
F: Acier inox A4 W.-Nr. 1.4401 AISI 316

Ø		
3,3	100	55445 32256
3,5	100	55445 32257
4,2	100	55445 32255



Technische Änderungen vorbehalten Subject to technical modifications Sous réserve de modifications (techniques)