

# DIN 7976 - ISO 1479

## SECHSKANT-BLECHSCHRAUBEN


MIT LÄNGSSCHLITZ - KOPF SCHARFKANTIG ABGEGRÄTET

## HEXAGON HEAD SELF TAPPING SCREWS

WITH SLOT - SHARP SHAPED HEAD

## VIS À TÔLE-TÊTE HEXAGONALE

AVEC FENTE - BOUT POINTU

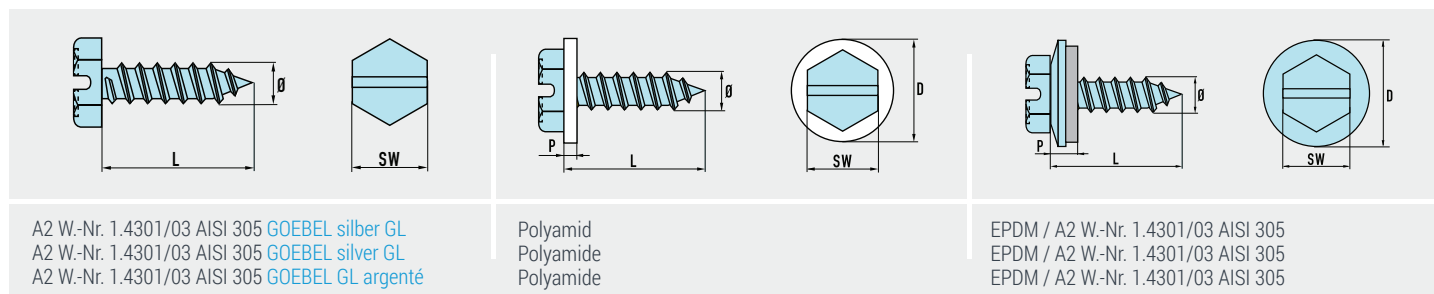

### Ø 4,2 mm

SW = 7 mm

L = 9,5 bis 25,0 mm -0,8 / +0,8 mm

= C

		CODE	P	D	CODE	P	D	CODE		
4,2 x 9,5 mm	1000	<a href="#">20401 42950</a>	2,0 mm	10,0 mm	1000	<a href="#">20402 42950</a>	3,0 mm	12,0 mm	500	<a href="#">20404 42950</a>
4,2 x 13 mm	1000	<a href="#">20401 42130</a>	2,0 mm	10,0 mm	1000	<a href="#">20402 42130</a>	3,0 mm	12,0 mm	500	<a href="#">20404 42130</a>
4,2 x 16 mm	1000	<a href="#">20401 42160</a>	2,0 mm	10,0 mm	500	<a href="#">20402 42160</a>	3,0 mm	12,0 mm	500	<a href="#">20404 42160</a>
4,2 x 19 mm	1000	<a href="#">20401 42190</a>	2,0 mm	10,0 mm	500	<a href="#">20402 42190</a>	3,0 mm	12,0 mm	500	<a href="#">20404 42190</a>
4,2 x 25 mm	500	<a href="#">20401 42250</a>	2,0 mm	10,0 mm	500	<a href="#">20402 42250</a>	3,0 mm	12,0 mm	500	<a href="#">20404 42250</a>

### Ø 4,8 mm

SW = 8 mm

L = 9,5 bis 25,0 mm -0,8 / +0,8 mm

= C

4,8 x 9,5 mm	1000	<a href="#">20401 48950</a>	2,0 mm	10,0 mm	1000	<a href="#">20402 48950</a>	3,0 mm	12,0 mm	500	<a href="#">20404 48950</a>
4,8 x 13 mm	1000	<a href="#">20401 48130</a>	2,0 mm	10,0 mm	1000	<a href="#">20402 48130</a>	3,0 mm	12,0 mm	500	<a href="#">20404 48130</a>
4,8 x 16 mm	1000	<a href="#">20401 48160</a>	2,0 mm	10,0 mm	500	<a href="#">20402 48160</a>	3,0 mm	12,0 mm	500	<a href="#">20404 48160</a>
4,8 x 19 mm	500	<a href="#">20401 48190</a>	2,0 mm	10,0 mm	500	<a href="#">20402 48190</a>	3,0 mm	12,0 mm	500	<a href="#">20404 48190</a>
4,8 x 25 mm	500	<a href="#">20401 48250</a>	2,0 mm	10,0 mm	500	<a href="#">20402 48250</a>	3,0 mm	12,0 mm	250	<a href="#">20404 48250</a>

### Ø 5,5 mm

SW = 8 mm

L = 9,5 bis 25,0 mm -0,8 / +0,8 mm

= C

5,5 x 16 mm	500	<a href="#">20401 55160</a>	2,0 mm	11,0 mm	500	<a href="#">20402 55160</a>	3,0 mm	16,0 mm	250	<a href="#">20404 55160</a>
5,5 x 19 mm	500	<a href="#">20401 55190</a>	2,0 mm	11,0 mm	500	<a href="#">20402 55190</a>	3,0 mm	16,0 mm	250	<a href="#">20404 55190</a>
5,5 x 25 mm	500	<a href="#">20401 55250</a>	2,0 mm	11,0 mm	250	<a href="#">20402 55250</a>	3,0 mm	16,0 mm	250	<a href="#">20404 55250</a>

### Ø 6,3 mm

SW = 10 mm

L = 9,5 bis 25,0 mm -0,8 / +0,8 mm

= C

6,3 x 16 mm	500	<a href="#">20401 63160</a>	2,0 mm	12,5 mm	500	<a href="#">20402 63160</a>	3,0 mm	16,0 mm	250	<a href="#">20404 63160</a>
6,3 x 19 mm	500	<a href="#">20401 63190</a>	2,0 mm	12,5 mm	500	<a href="#">20402 63190</a>	3,0 mm	16,0 mm	250	<a href="#">20404 63190</a>
6,3 x 25 mm	250	<a href="#">20401 63250</a>	2,0 mm	12,5 mm	250	<a href="#">20402 63250</a>	3,0 mm	16,0 mm	250	<a href="#">20404 63250</a>